

Off-Grid

60W

M10 / 182mm Cell - 33 Cut cells

KEY FEATURES



Outstanding Power Generation




Anti PID/ Low LID protection



Lower temperature coefficient



Less Hot Spot Shading effects

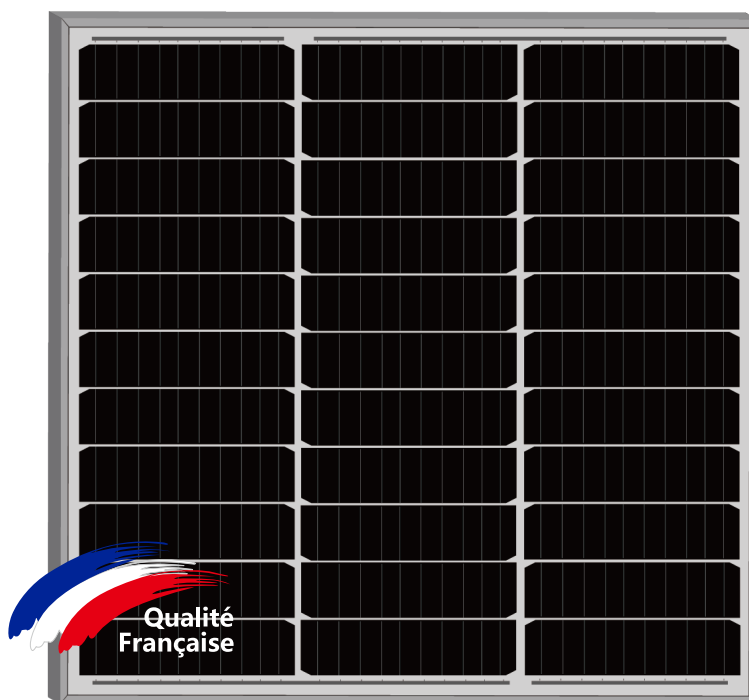

18.15%

Maximum Efficiency

0~±3%

Positive Power Tolerance

60W

Maximum Power Output

GRADE A

Cells Guaranteed

COMPREHENSIVE CERTIFICATES


IEC 61215/ IEC 61730 / IEC 61701 / IEC 62716
ISO 9001 : Quality Management Systems



LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty

25 Year Linear Power Warranty

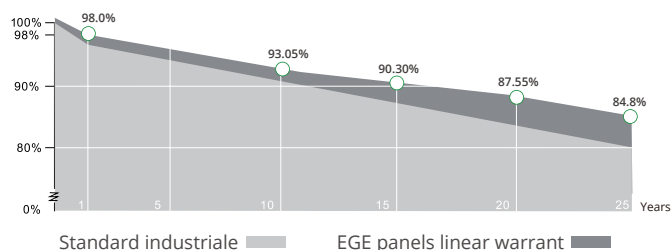


60W


Off-Grid P-type

Characteristics


IV-Curves Irradiance

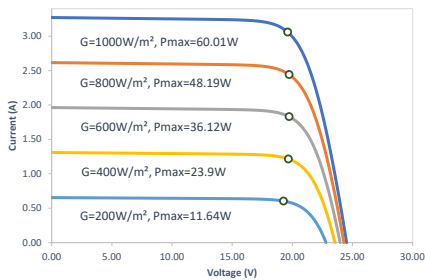

IV-Curves Temperature

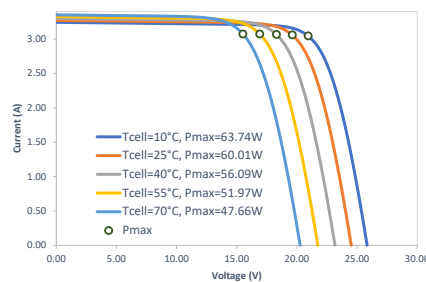

Temperature Dependence of Isc, Voc, Pmax

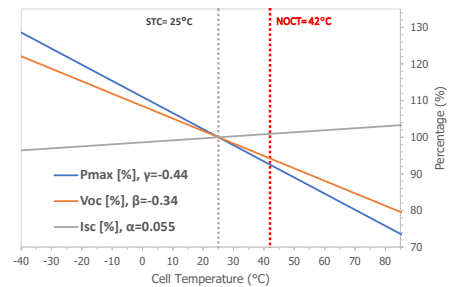

Electrical Characteristics (STC: E=1000W/m² - Tcell=25°C - AM1.5 NOCT: E=800W/m² - T=20°C - v=1m/s)

Module Type	EGE 60W 33M(M10)	
	STC	NOCT
Power output (Pmax)	60 W	44.60 W
Maximum power voltage (Vmp)	19.47 V	18.20 V
Maximum power current (Imp)	3.09 A	2.45 A
Open circuit voltage (Voc)	22.64 V	22.70 V
Short circuit current (Isc)	3.27 A	2.64 A
Power tolerance	0 ~ ± 3%	
Module efficiency	18.15 %	

Mechanical Characteristics

Cell type	Monocrystalline (182x45.5 mm)
Number of cells	33 (3x11)
Dimensions	580x570x25mm (1.5mm Cell Gap)
Weight	3.5 kg
Glass	3.2mm, tempered glass, AR coated
Frame	Anodized aluminium alloy
Junction box	IP65 rated, 3 bypass diodes
Cable	4.0 mm², 500 mm (+/-) 500 mm (-): Length can be customized
Connector	MC4, MC4-EVO2 compatible

Operating Condition

Operating temperature range	-40°C~+85°C
Max system voltage (IEC)	1000 VDC
Max series fuse rating	10 A
Max front load (e.g.: snow)	5400 Pa
Max back load (e.g.: wind)	2400 Pa

Packaging (Dimensions of pallet: 590*600*65mm)

Type	Quantity	Weight
Per Pallet	2 pcs	7 kg
40ft HQ Container	5600 pcs	19.6 t

Engineering Drawings

