

ECO GREEN ENERGY
Building a Greener World

OPzV Tubular Gel Battery

2V 1000Ah



Eco Green Energy Gel Battery

Eco Green Energy OPzV tubular gel batteries were designed to deliver the best performance and durability. The use of top-quality raw materials enables the Eco Green Energy batteries to be protected from corrosion, while extending the battery's cycle life.

KEY FEATURES

- Low self-discharge and long shelf life
- Safety valve installation for explosion proof
- Non-spillable construction
- Exceptional deep discharge recovery performance



eco-greenenergy.com

Headquarters

📍 299 Xing Cheng Road, Chong Chuan District, Nantong, Jiangsu, China
☎ +86 513 66690088
✉ info@eco-greenenergy.com

EU Office

📍 1 rue Bender, L-1229 Luxembourg City
☎ +352 6 61 51 31 50
✉ info@eco-greenenergy.com


Electrical Parameters

Nominal Voltage	2V
Number of Cells	1
Rated Capacity (C10 to 1.80V per Cell)	1000Ah
Charge Voltage at 25 °C	
- Float Voltage	2.25-2.30V
- Float Temperature Compensation Coefficient	±3mV/Cell °C
- Average Voltage	2.35 - 2.40 V
- Equalization Temperature Compensation Coefficient	±4mV/Cell °C
Max Charge Current	250A
Max Discharge Current	3000A
Self-Discharge rate at 25 °C	2% per month



Environmental Parameters





Recommended Operating Temperature Range	20 - 30°C
Operating Temperature Range	
- Discharge	-40 - 55°C
- Charge	-20 - 50°C
Storage Temperature Range	-20 - 40°C

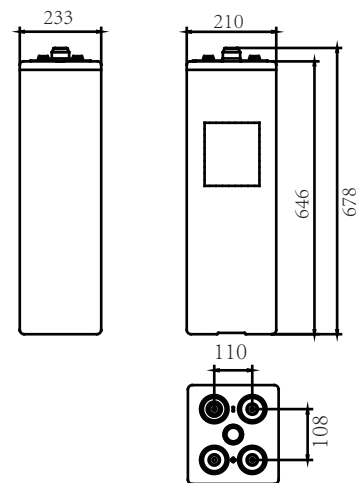

Mechanical Parameters

Dimensions (L*W*H)	233*210*646mm
Total height	678mm
Weight	77kg
Terminal Bolt Size	M8
Recommended Terminal Initial Torque	5.5Nm
Cover Material	ABS

PERFORMANCE CHARACTERISTICS

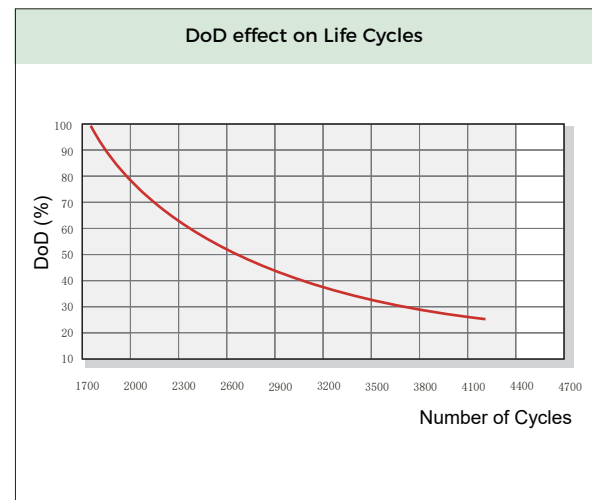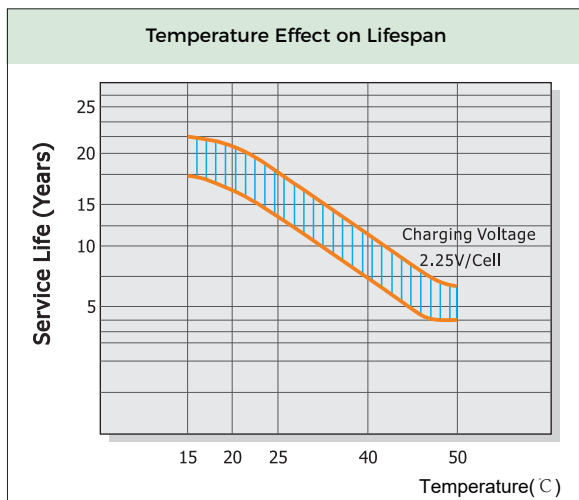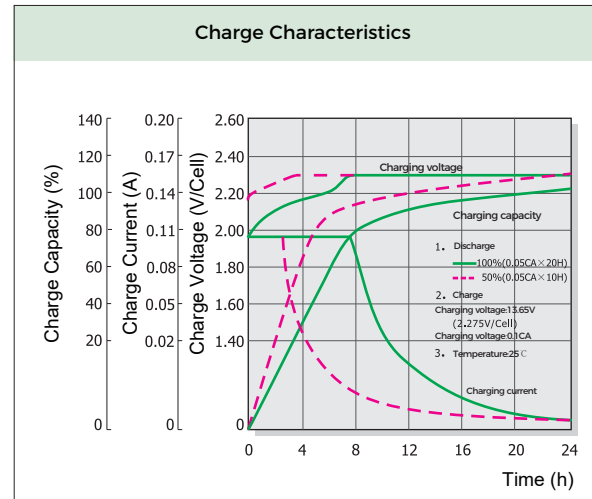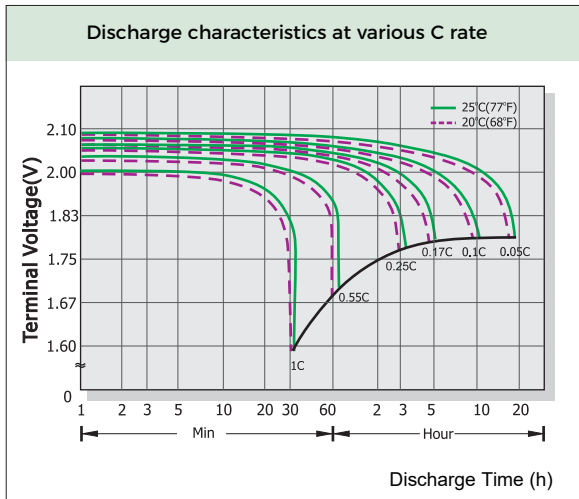

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.